


MANGUEIRA VAPOR

NORMA SAE 100R14

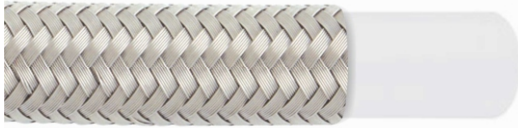

Bitola								
		Diâmetro Interno	Diâmetro Externo	Pressão Máx. Trabalho		Pressão Min. Ruptura		Raio Min. Curvatura
Traço	Pol.	mm	mm	Bar	Psi	Bar	Psi	mm
-4	3/16"	4,8	7,4	200	2900	800	11600	50
-5	1/4"	6,35	8,9	175	2540	700	10150	76
-6	5/16"	8,0	10,9	150	2175	600	8700	100
-8	13/32"	10,35	13,3	130	1885	520	7540	130
-10	1/2"	12,7	15,7	120	1740	480	6960	170
-12	5/8"	16,0	19,1	110	1595	440	6380	200
-16	7/8"	22,2	25,7	70	1015	280	4060	230

Fluido Recomendado: óleos minerais, óleos solúveis em água, derivados de petróleo (vide tabela de compatibilidade)

Camada Interna: PTFE extrusado

Cobertura: um trançado de aço inoxidável

Temperatura Mínima: -73° C

Temperatura Máxima: +232° C